

# POWER dot MIDI


- 935-PM60W-GST
- 935-PM60-GST

- A** - Removable installation
- B** - Permanent installation

**CONTENT:**

- x1**
- x1**
- x2**

- 1 feed-through (10 x 20 mm)
- 1 Schuko socket
- 1 GST18i3  
Cable length according to order (max 1.5 m)

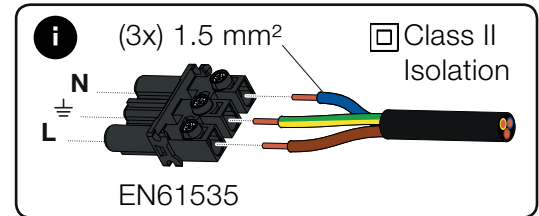

**1A** DRILL  
Drill a hole in the table

**1B** DRILL  
Drill a hole in the table

REMOVABLE INSTALLATION

PERMANENT INSTALLATION

**2A** INSERT  
Insert Powerdot into the hole and feed the power plug through the plastic fastening nut (without using the cable clips).

REMOVABLE INSTALLATION

**3A** TURN CLOCKWISE & PLUG IN  
Turn the plastic fastening nut as far up the thread as possible. Make sure it has been thoroughly tightened. Lastly, connect the GST18i3.

52 mm maximum

**2B** ATTACH & INSERT (NON REMOVABLE)  
Attach clips by guiding them into the side tracks. The clips will keep the product in place without the fastening nut. Push the Powerdot all the way down the hole. Lastly, plug it in to the wall socket.

**NOTE!** Once inserted, removing the product will prove to be very difficult without damaging the table and/or the product.

Optional

Minimum 20 mm

PERMANENT INSTALLATION

**HOW TO REMOVE (WITH CLIPS)**  
To increase your chances of removing once installed with clips, turn the grommet clockwise. Until the clips re-position and loosen up.

**NOTE!** The table or product might get damaged during the process.

45°

**PULL UPWARDS**  
If you successfully loosened up the clips. Pull upwards until fully removed.