





HSL USB TYPE-C KVM CABLES

High Sec Labs USB-C adapting cables are designed to connect USB-C devices to HSL's KVM Switches. USB-C is a single connector allowing the transfer of Video, USB, Power and Network. HSL's adapting cables are leveraging the flexibility of USB C to create an easy to use solution to connect devices to HSL's KVMs.

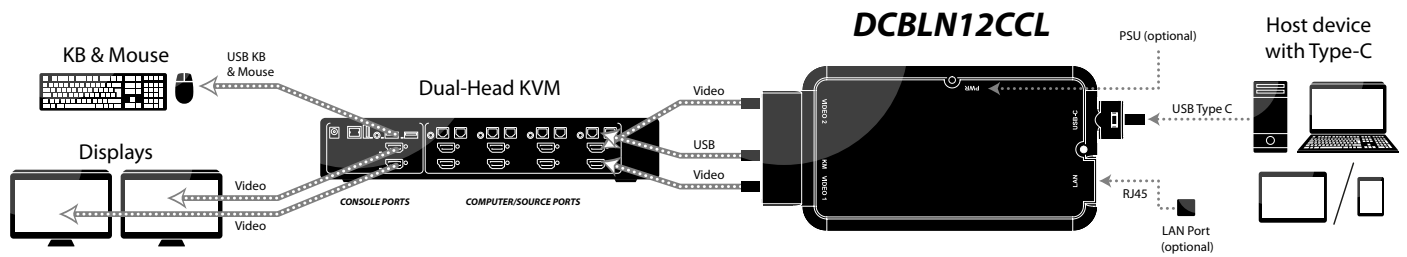

USB Type-C to DP Dual-Head KVM Cable System Diagram

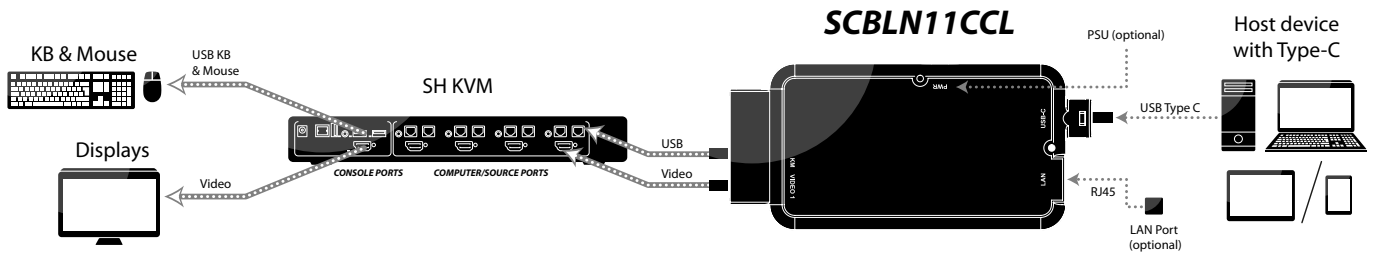

USB Type-C to DP SH KVM Cable System Diagram

SPECIFICATION

MODEL NUMBER	SCBLN11CL	SCBLN11CCL	DCBLN12CCL	DCBLN12CCL5M
FEATURES				
Input Interface (Host)	LAN + Type-C	LAN + Type-C	LAN + Type-C	LAN + Type-C
Output Interface (Video)	—	4K 60HZ Single Head	4K 30HZ Dual Head, 4K 60HZ Single Head	4K 30HZ Dual Head, 4K 60HZ Single Head
USB Compliance	—	USB 2.0	USB 2.0	USB 2.0
Charging	PD 2.0 complaint up to 100W	PD 2.0 complaint up to 100W	PD 2.0 complaint up to 100W	PD 2.0 complaint up to 100W
Cable length	3ft USB C	3ft USB C, 1 x 6FT Video and USB	3ft USB C, 2 x 6FT Video and USB	16ft USB C, 2 x 6FT Video and USB
Network	100MB	100MB	100MB	100MB
PHYSICAL				
Dimensions	129.5 x 65.4 x 17 mm / 5.1 x 2.6 x 0.7 inch	142.5 x 65.4 x 17 mm / 5.6 x 2.6 x 0.7 inch		
ENVIRONMENTAL				
Operating Temperature	- 0°C to 40°C (32°F to 104°F)			
Storage Temperature	-20°C to 60°C (-4°F to 140°F)			
Humidity	Operating - 20 to 80% non-condensing; Storage - 10 to 90% non-condensing			
Altitude	0 to 10,000 ft			
GENERAL INFO				
Made In	ISRAEL/USA			
Product Life-cycle	10 years			
Warranty	2 Years			

SCBLN11CL



SCBLN11CCL



DCBLN12CCL/DCBLN12CCL5M

