



# iHub

USB Type C Hub 9-in-1 with wireless charging

Model: iHub 901W



[www.infobitav.com](http://www.infobitav.com)

[info@infobitav.com](mailto:info@infobitav.com)

## **NOTE:**

1. Please use  $\geq 60W$  power adapter in order to make sure product works stable and full, if using  $\leq 60W$  power adapter, maybe it causes product works unstable.
2. Do not place the metal block on the top of the docking station for a long time.
3. TF and SD card can't be recognized on the same time, only plug in TF card or SD card separately when using.

## **Introductions:**

USB C Hub, 9 in1 USB C Docking Station to HDMI, Wireless Charger, Gigabit Ethernet, 3 USB 3.0, 60W PD RJ45, SD/TF Card Reader, USB C Dock for MacBook Pro and Type C Device (Thunderbolt 3)

## **Product Features:**


Built-in USB Type-C pigtail cable, plug and play  
3x USB A 3.0 ports, 5Gbps  
1x card reader: TF/SD  
1x 10M/100M/1,000M Gigabit Ethernet port  
1x HDMI Output port: resolutions up to 4K30  
1x USB C PD 60W port  
1x 7.5W wireless charging pad

## **Specifications:**


Model	iHub 901W
Name	USB Type C Hub 9-in-1 with wireless charging
HDMI output resolution	3840x2160/30Hz
RJ45 max speed	1000Mb/S
USB port max speed	5.0 Gbs
TF card max speed	480Mb/s
SD card max speed	480Mb/s
PD charging power	60W
PD Maximum input voltage	20V
Wireless charging max power	9V/7.5W
Range of working temperature	-10~+55°C
Storage temperature	-26~+60°C
Working humidity	10~90%RH (non-condensing)

Storage humidity	5~95%RH (non-condensing)
Bare metal size	390x 96.5x 25.8 mm
Bare weights	125g
Shell Material	Plastic + Alloy
Shell Color	Black

### Interface Diagrams:

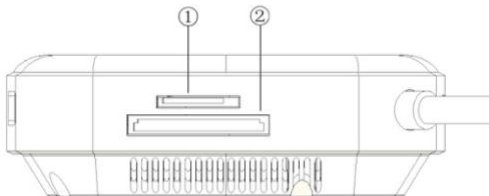


- ① Card Reader: TF card port (TF card and SD card cannot be recognized at the same time)
- ② Card Reader: SD card port (TF card and SD card cannot be recognized at the same time)

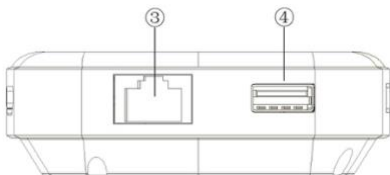


③ Gigabit Ethernet port

④ USB3.0 A

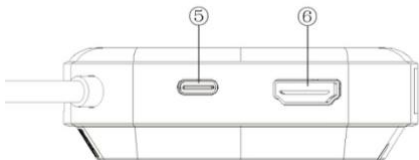


⑤ PD interface, connect to laptop's power adapter

⑥ HDMI Output port, supports 4k resolution

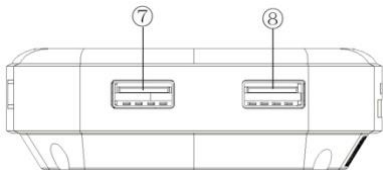

⑦ ⑧ USB3.0 A interfaces

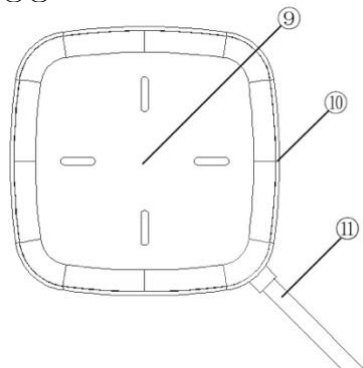


⑨ Wireless charging area, make sure to place device into here correctly.

⑩ Wireless charging indicator light, respiration status indicator during charging

⑪ Type-C cable, connect to the type-c port on laptop

### Connection and Operating:

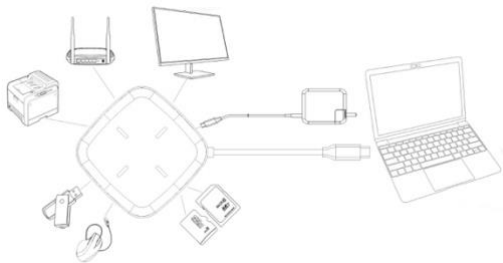

1. Connect the devices which you need to use to corresponding interface: like USB Disk, Mouse, Keyboard, Printer, Router, Display etc.
2. Connect the power adapter to the PD
3. Connect the docking station to the Type-C port of computer.
4. Place the mobile phone to charge